



## Rapid Fill Adapter



**For Assistance:**  
**[www.CoolFireTrainer.com](http://www.CoolFireTrainer.com)**  
**918-973-COOL**  
(918-973-2665)

**Installation and Operating  
Instructions**



## CoolFire Rapid Fill Adapter (w/Laser) Installation and Operating Instructions

1. The Rapid Fill Adapter must be installed after the barrel has been installed in the gun.  
2. If installed, remove the laser from the end of your barrel. (Fig. 1)



3. To ensure there is no CO<sub>2</sub> remaining in the kit, push the 0.050" allen wrench (provided with your kit) into the fill tip until CO<sub>2</sub> escapes. (Fig. 2)



4. Once the barrel is empty, use the fill tip removal tool to remove the fill tip by unscrewing it. (Fig. 3)



5. Store the removed fill tip to prevent loss.



6. Apply a small amount of Teflon® grease (supplied) to the O-ring (Fig. 4)

7. Use the supplied washers to "clock" the Rapid Fill Adapter, orienting the fill tip in a manner to ease filling. (Fig. 5)




8. Thread the Rapid Fill Adapter (w/laser) into the end of your barrel. Do not over-tighten. (Fig. 6)



9. Place a small amount of Teflon® grease on the fill tip before use. (Fig. 7)



10. To fill the system, press the fill tip of the Rapid Fill Adapter into the fill nose of your bottle adapter (90gr, 20oz or Charging Station) for approx. 2 seconds. (Fig. 8)

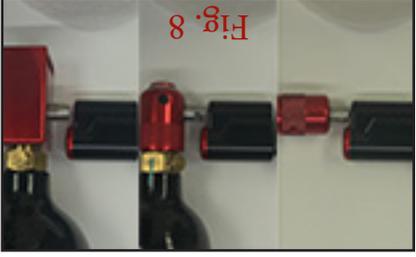

11. To remove the Rapid Fill Adapter, use the supplied allen wrench to purge the CO<sub>2</sub> (Fig. 9)



12. Unscrew and store Rapid Fill Adapter.

13. Apply a small amount of grease to the o-ring on the fill tip removed in step 4. Reinstall with supplied tool. (Do not over-tighten.)

**Attention!!** All laser information and warnings found in the **CoolFire** kit manual apply to the Extend-A-Shot. Please refer to manual for further information.

