



Extend-A-Shot



For Assistance:
www.CoolFireTrainer.com
918-973-COOL
(918-973-2665)

Installation and Operating
Instructions


CoolFire Extend-A-Shot System (w/Laser)

Installation and Operating Instructions

1. The Extend-A-Shot system must be installed after the barrel has been installed in the gun.



2. If installed, remove the laser from the end of your barrel. (Fig. 1)

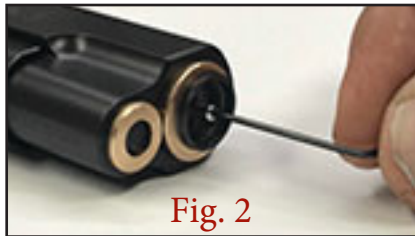


3. To ensure there is no CO₂ remaining in the kit, push the 0.050" allen wrench (provided with your kit) into the fill tip until CO₂ escapes. (Fig. 2)



4. Once the barrel is empty, use the fill tip removal tool to remove the fill tip by unscrewing it. (Fig. 3)

5. Store the removed fill tip to prevent loss.

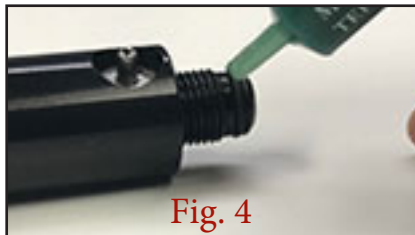

6. Apply a small amount of Teflon® grease (supplied) to the O-ring (Fig. 4)

7. Use the supplied washers to “clock” the Extend-A-Shot, orienting the fill tip in a manner to ease filling. (Fig. 5)



8. Thread the Extend-A-Shot (w/laser) into the end of your barrel. Do not over-tighten. (Fig. 6)




9. Place a small amount of Teflon® grease on the fill tip before use. (Fig. 7)



10. To fill the system, press the fill tip of the Extend-A-Shot into the fill nose of your bottle adapter (90gr, 20oz or Charging Station) for approximately 2 seconds. (Fig. 8)

Train like a **MONSTER**

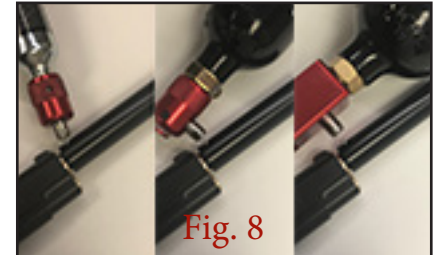

11. To remove the Extend-A-Shot system, use the supplied allen wrench to purge the CO₂. (Fig. 9)

12. Unscrew and store Extend-A-Shot.

13. Apply a small amount of grease to the o-ring on the fill tip removed in step 4. Reinstall with supplied tool. (Do not over-tighten.)



Attention!! All laser information and warnings found in the **CoolFire** kit manual apply to the Extend-A-Shot. Please refer to manual for further information.

